

# RFID Dog Tag With MIFARE Ultralight EV1 Chip-spec sheet





RFID pet tag can effectively manage your pet cat or dog. Each pet tag has its own unique UID, that can be used to identify your pet.

Each rfid pet tag can write pet information and other information you want to write.

## Parameters

Item	RFID Dog Tag With MIFARE Ultralight EV1 Chip	Color	Customizable	Working Temperature	-25°C to 65°C
Material	PVC,PET,EPOXY	Size	Custom	Data Retention Time	10 years
Write Endurance	100000 times	Protocol	ISO14443A	Printing Options	Silk-screen printing, Laser Engraving, CMYK full color, Pantone, etc.
Frequency	13.56 MHz	Reading Distance	0-10cm	Craft	Logo or number printing, Bar code, QR code, etc.

## Dimensional Diagram

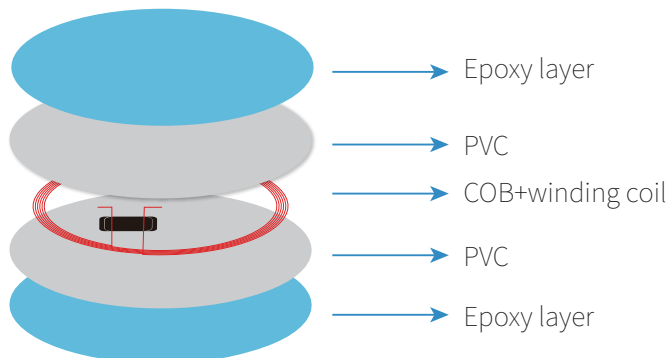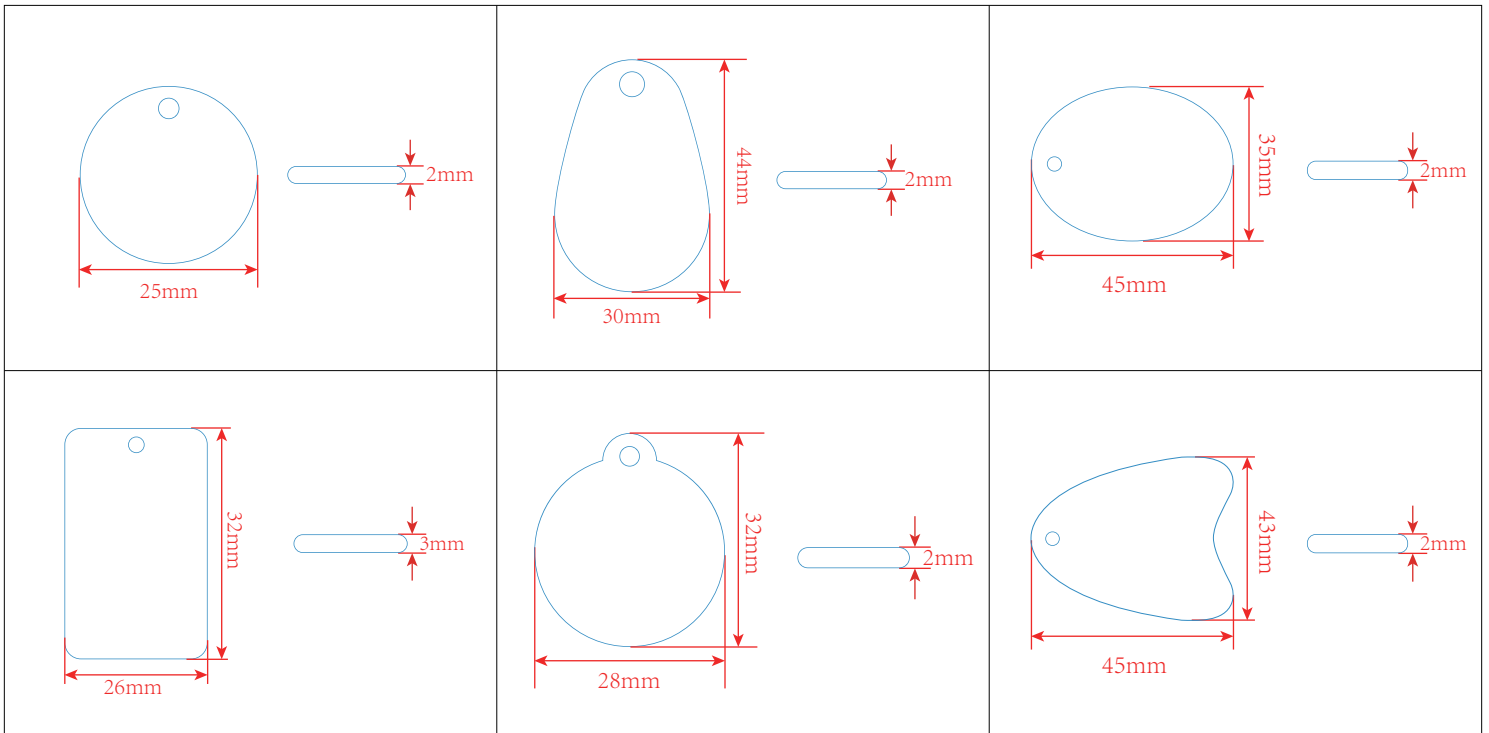

## Available chips

### HF 13.56 MHz Chips

Chip Name	Protocol	Capacity	Frequency
Ntag213	ISO14443A	180 byte	13.56 MHz
Ntag215	ISO14443A	540 byte	13.56 MHz
Ntag216	ISO14443A	924 byte	13.56 MHz
MIFARE Classic 1K	ISO14443A	1 KB	13.56 MHz
MIFARE Classic 4K	ISO14443A	4 KB	13.56 MHz
MIFARE Ultralight EV1	ISO14443A	80 byte	13.56 MHz
MIFARE Ultralight C	ISO14443A	192 byte	13.56 MHz
ICODE SLIX	ISO15693	1024 bits	13.56 MHz

## Feature

- ▶ Contactless power supply
- ▶ Waterproof, chip life up to 10 years
- ▶ Quickly read pet information
- ▶ Can tie a pet with a beautiful rope.