


NTAG213 Blank Card- spec sheet

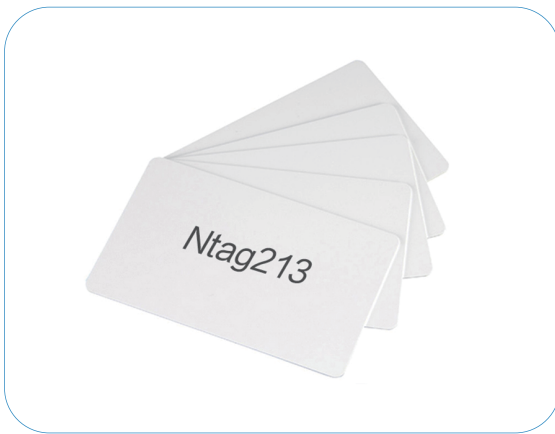


Ntag213 Blank Card is generally white and can be used directly, but you can print the image you want on the printable RFID Ntag213 blank card to make a membership card, student card, employee card, parking card, etc. This blank card has full features of the Ntag213 chip, such as the UID ASCII mirror. The Ntag213 chip is the connotation and core of this NFC blank card, which gives it the vitality of NFC technology, enabling it to achieve many functions, such as access control, social interaction, tracking, payment, etc.

Parameters

Item	Ntag213 Blank Card	Color	White	Working Temperature	-25°C to 65°C
Material	PVC	Size	85.5*54mm	Data Retention Time	10 years
Chip	NTAG213	Reading Distance	0~10 cm	Craft	Logo or number printing, Bar code, QR code, etc.
Frequency	13.56 MHz	Write Endurance	100000 times	Memory	144 bytes
Protocol	ISO14443A	Printing Options	Silk-screen printing, Laser Engraving, CMYK full color, Pantone, etc.		

Dimensional Diagram

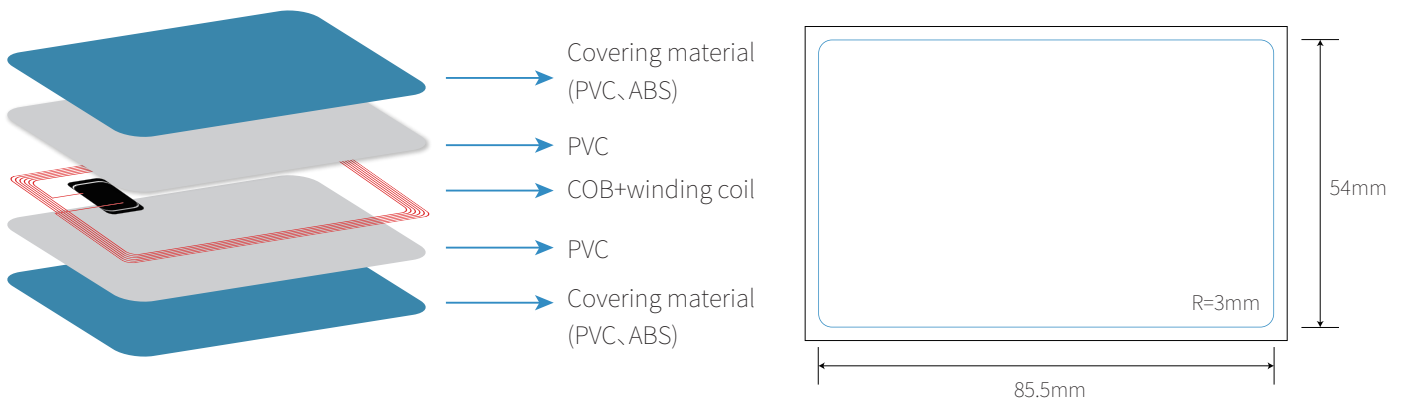

Feature

- ▶ Exquisite in craftsmanship, smooth and without burrs, no indentation
- ▶ Affordable, high quality, and support customization.
- ▶ Operating range up to 100mm (depending on various parameters)
- ▶ Can be erased and reprogrammed repeatedly
- ▶ Wide application: VIP membership card, parking card, campus card, transportation card, health insurance card, club card, access card, etc.
- ▶ Operating frequency of 13.56MHz
- ▶ 100% compatible with NFC-enabled devices
- ▶ Support double-sided printing
- ▶ 144 bytes of user data

Available chips

HF 13.56 MHz Chips

Chip Name	Protocol	Capacity	Frequency
Ntag213	ISO14443A	180 byte	13.56 MHz
Ntag215	ISO14443A	540 byte	13.56 MHz
Ntag216	ISO14443A	924 byte	13.56 MHz
MIFARE Classic 1K	ISO14443A	1 KB	13.56 MHz
MIFARE Classic 4K	ISO14443A	4 KB	13.56 MHz
MIFARE Ultralight EV1	ISO14443A	80 byte	13.56 MHz
MIFARE Ultralight C	ISO14443A	192 byte	13.56 MHz
ICODE SLIX	ISO15693	1024 bits	13.56 MHz