

## Epoxy RFID keyfob- spec sheet



This is an attractive RFID product, small and exquisite, convenient and practical. XIN YETONG provides you with the personalized RFID epoxy keyfob with a low price.

Born with a protective shell, corrosion-resistant, shockproof and waterproof.



Support OEM customized services, a variety of chips and materials are available.

Easy to carry and widely used, such as access control, hotel locks, school campus access, health clubs, animal identification, transportation payment, etc.

### Parameters

Item	Epoxy RFID keyfob	Color	Customizable	Working Temperature	-25°C to 65°C
Material	PVC,PET,EPOXY	Size	Custom	Data Retention Time	10 years
Write Endurance	100000 times	Protocol	ISO14443A	Printing Options	Silk-screen printing, Laser Engraving, CMYK full color, Pantone, etc.
Frequency	13.56 MHz	Reading Distance	0-10cm	Craft	Logo or number printing, Bar code, QR code, etc.

### Dimensional Diagram

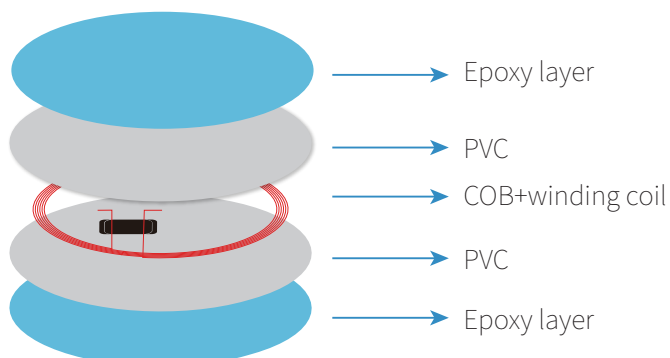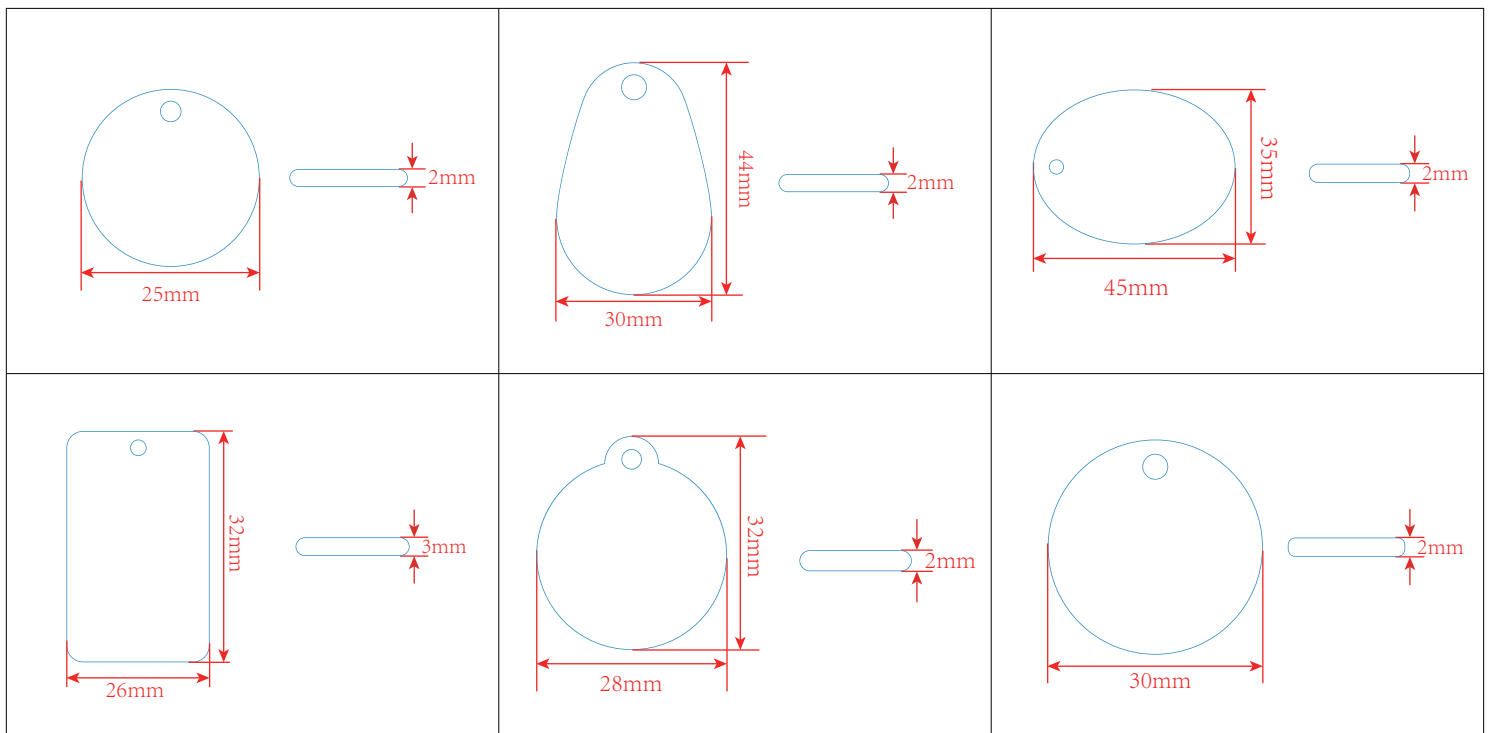

## Available chips

### HF 13.56 MHz Chips

Chip Name	Protocol	Capacity	Frequency
Ntag213	ISO14443A	180 byte	13.56 MHz
Ntag215	ISO14443A	540 byte	13.56 MHz
Ntag216	ISO14443A	924 byte	13.56 MHz
MIFARE Classic 1K	ISO14443A	1 KB	13.56 MHz
MIFARE Classic 4K	ISO14443A	4 KB	13.56 MHz
MIFARE Ultralight EV1	ISO14443A	80 byte	13.56 MHz
MIFARE Ultralight C	ISO14443A	192 byte	13.56 MHz
ICODE SLIX	ISO15693	1024 bits	13.56 MHz

## Feature

- ▶ Born with a protective shell, corrosion-resistant, shockproof and waterproof.
- ▶ Support OEM customized services, a variety of chips and materials are available.
- ▶ Various styles and colors are available
- ▶ Multiple chips can be packaged on demand
- ▶ Diversity crafts to choose from
- ▶ Design and make according to customers

## APPLICATIONS

- access control
- hotel locks
- animal identification
- school campus access
- health clubs
- transportation payment